


EV-FLEX

Automated Battery Module Welding System

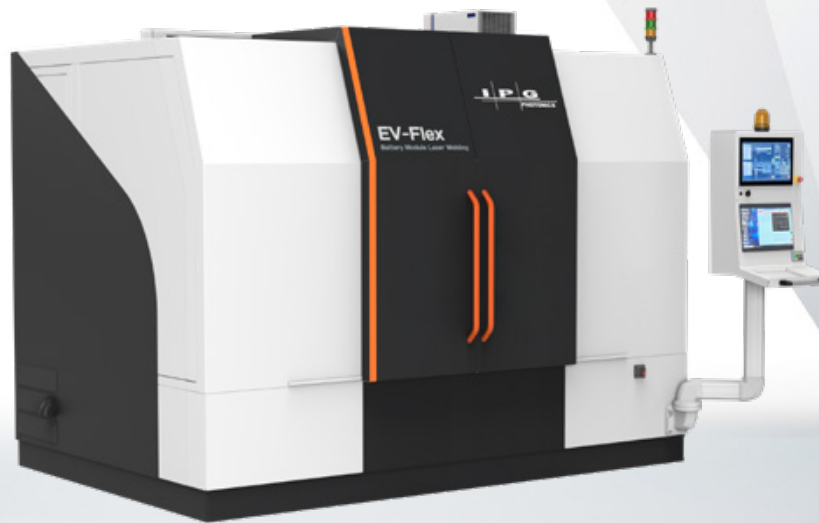

FEATURES

- ▶ Suitable for cylindrical, prismatic and pouch cells
- ▶ Max. battery size [mm]: 1200 x 1000 x 300
- ▶ Vision Alignment system (image processing for position correction)
- ▶ Cell-to-Pack & Cell-to-Body capable
- ▶ System expandable for serial production
- ▶ "Plug & Produce" – short commissioning time
- ▶ Compact & robust machine design
- ▶ All components installed on a base frame
- ▶ Mobile manufacturing cell, suitable for forklifts
- ▶ Ease of use - intuitive user interface
- ▶ Class 1 laser certified safety enclosure



OPTIONS

- ▶ Conveyor system for automated part feedthrough
- ▶ LDD-700 Real-time weld measurement

EV-FLEX battery module welding systems are fully automatic laser processing solutions for welding cylindrical, prismatic and pouch cells interconnecting busbars. Systems can be configured for manual or conveyor-fed part loading and are suitable for process development, welding of prototypes, and small volume or mass production. Integration of conveyor and part transport systems is an available option.

EV-Flex is configurable with IPG welding lasers of the YLS and AMB series and corresponding 2D scanners. IPG e-mobility experts provide guidance to select the best equipment for specific applications (material/thickness combinations) based on proven battery welding implementations.

System options include real-time weld measurement for 100% weld qualification and examination of weld seams.

EV-FLEX

Automated Battery Module Welding System

System Specifications

Laser Source	IPG Single and Multi-mode industrial fiber lasers from 1000 to 6000W
Welding Head	IPG 2D High Power Scanner
Battery - max size L x W x H, mm	1200 x 1000 x 300
Battery - max weight, kg	500
Scanner Focal Length, mm	254 or 415 Options
Gantry Travel X x Y x Z, mm	750 x 490 x 295
Weld Positioning Accuracy, mm	± 0.1 (When using vision alignment position correction)
Motion Control	Siemens 3-axis CNC control
Laser Safety Enclosure	Class 1
Dimensions L x W x H, mm	3500 x 2500 x 2900
Weight, kg	4100
Operating Ambient Temperature, °C / °F	5 - 45 / 41 - 113
Relative Humidity	< 60%, no condensation or frost

System Options

Laser Source	Adjustable Mode Beam (AMB) 2/4 kW core/ring Single-mode or multi-mode Independent core and ring power control	YLS 1 - 2 kW Single-Mode 4 - 6 kW Multi-Mode
Real-time weld measurement	LDD-700	
Loading	Front: Manually or by means of a conveyor system	
Clamping Device	Customer and component specific	
Position adjustment for x-, y- and z-direction & quality monitoring	All functions of the LDD-700 system can be used for position and quality control as well as position correction within the system accuracy of +/- 0.1 mm	
Laser power monitoring	Integrated power meter for automatic, programmable measurement	



+49 2736 4420-8885

IPGL-systemsales.europe@ipgphotonics.com

lasersystems.ipgphotonics.com/en-US

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2024 IPG Photonics Corporation. All rights reserved.